

PUBLIC NETWORK MOBILE RADIO


- Full Netcom dual card automatic switching
- Double PTT buttons
- 2.8 inch large screen display
- The operating voltage is compatible with 12V/24V

MD10




USER'S MANUAL

Key instruction

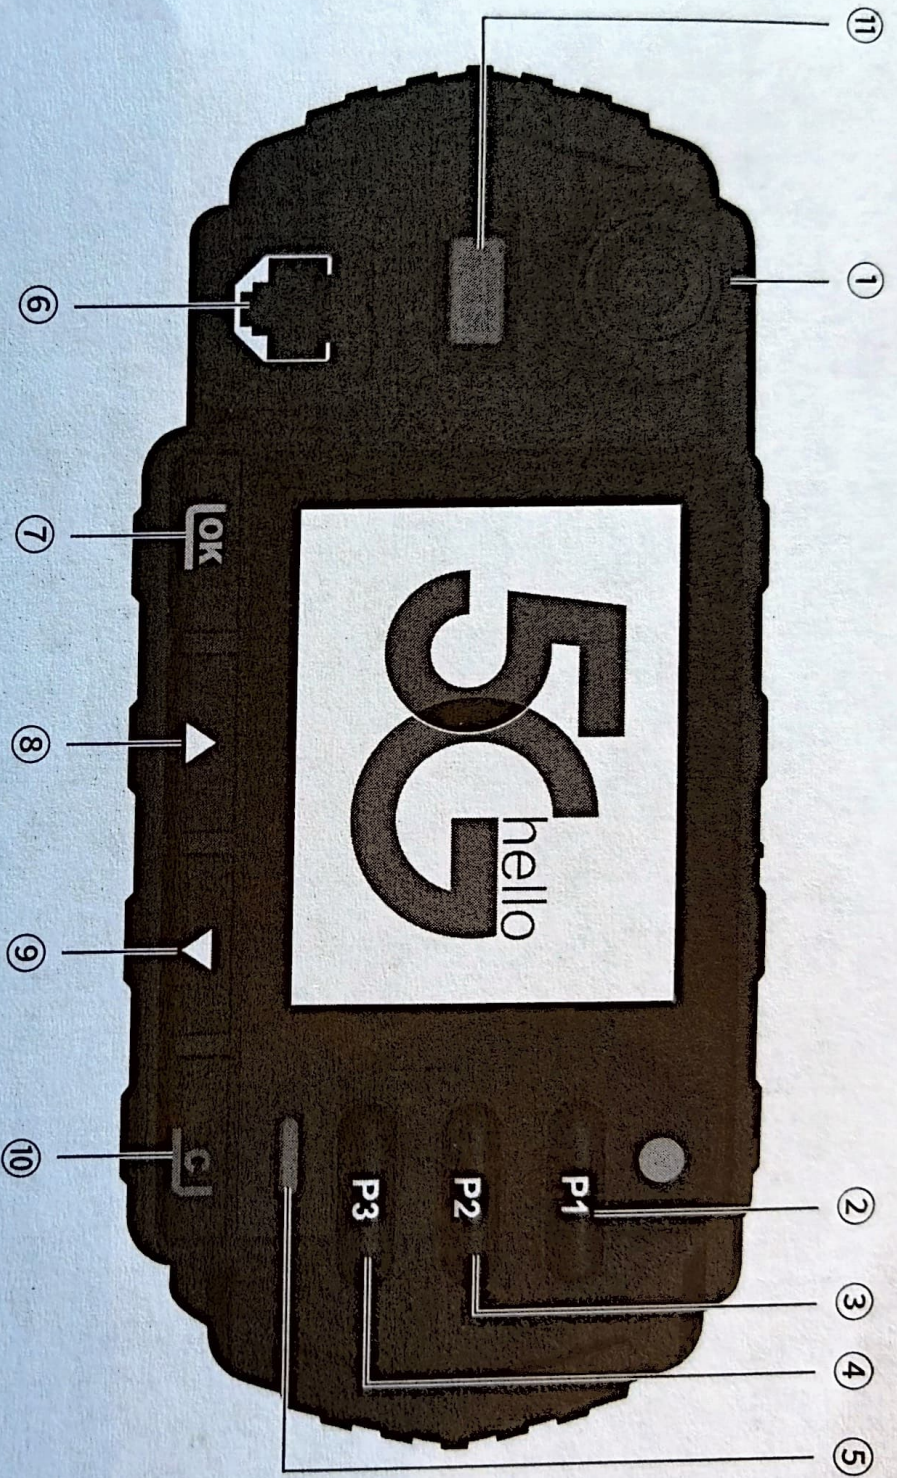


- ① Power switch/volume knob
- ② P1 Tap and select a group
- ③ P2 Press member selection
- ④ P3 Press SIM to switch
- ⑤ Power/emission indicator
- ⑥ Connect the hand Mimi head port
- ⑦ Function menu key, confirm key
- ⑧ The up key is used in the function menu, and the short press on the main screen is used to select the group
- ⑨ Use the lower key in the function menu, and tap on the home screen to select members
- ⑩ Return/Exit key
- ⑪ SOS alarm requires platform support

Back instruction

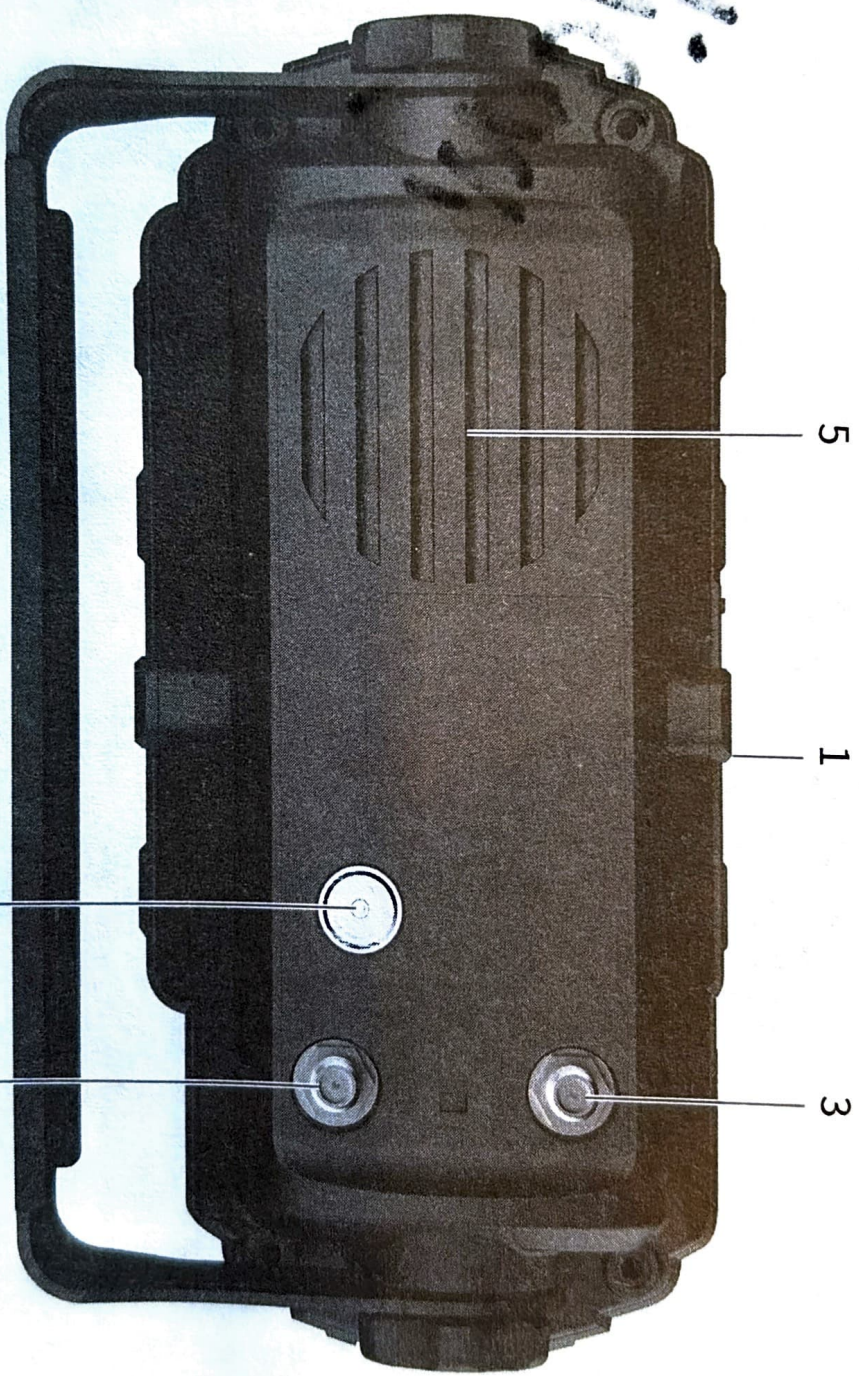

- 1. SIM card slot
- 2. Power port
- 3. Ports on the main antenna
- 4. GPS antenna interface (optional function)
- 5. Speakers

Hand instruction

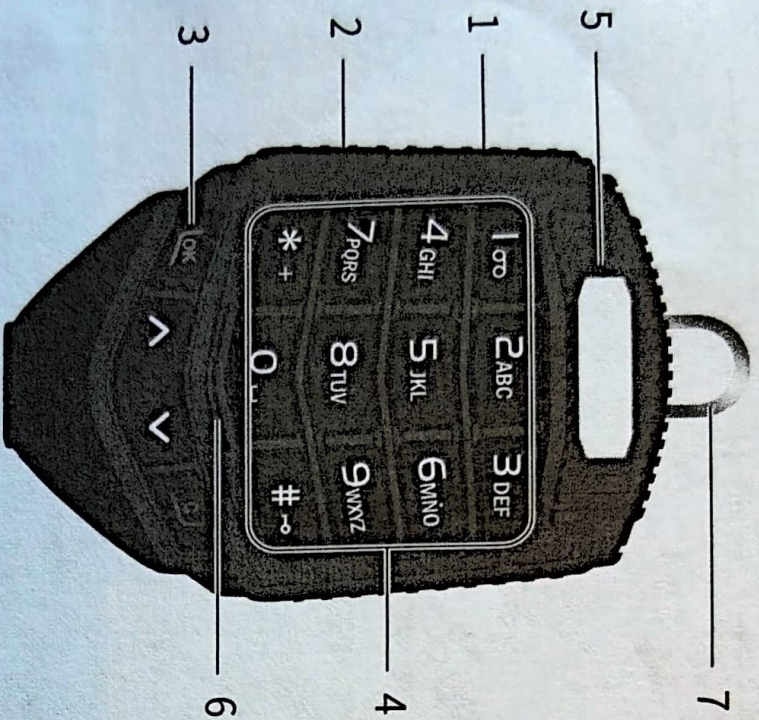

1. PTT launch button
2. Spare the launch button
3. Function selection area
4. Dial numeric keys and shortcut numeric keys
5. Voice mic Hole
6. Launch indicator
7. Hand hooks

Basic operation

On/off steps

Long press the power switch key for 2 seconds to start, the screen will light up and then connect to the power supply of the traffic station, bright blue indicator, after landing successfully into the group, Press and hold the power on key again for 2 seconds to turn off the platform.

Adjust the volume

Turn volume knob, power switch adjust volume. Turn clockwise to increase the volume, turn counterclockwise to decrease the volume

Group selection operation

In the standby state, click the **LOK** key to enter the menu mode to enter the group list, select the corresponding group by using the **▲/▼** key, and press the **LOK** key to confirm the access.

Or click the group shortcut key to enter the group selection, and then select the required group according to the relevant operations. (Click **☐** to return to the previous interface)

Member selection operation

In the standby state, click the **LOK** key to enter the menu mode, enter the member list, select the corresponding member by the **▲/▼** key, press the **LOK** key to confirm the mark, select the call, and press PTT to confirm the single call.

Address book

1: address book list

You can select a saved phone number from the address book list, select the number you want to dial, and press the Confirm key

2: New

Click [Name] and press # to switch the input method. After the input is completed, press the confirm key to confirm

Click [Number] to enter the phone number, and then press the confirm button to confirm

After the above editing is completed, select [Save] to save it to the address book list

Call log

After entering, you can query the dialed records

Settings

1: Voice broadcast

You can choose to turn on or off. If you choose to turn off, the menu voice prompt will be turned off

2: Backlight Settings

1. Backlight control. The backlight extinguishing time can be selected after entering

2. Call backlight control. After you turn off the option, the screen will not light up during the intercom

3: BFP tone Settings

After entering, the up/down key beeps can be turned on or off

4: Situational model

The outdoor finger horn gain is the loudest, the standard finger horn gain is medium, and the indoor finger horn gain is the smallest

5: Microphone mode

Low finger microphone gain sensitivity is minimum, middle finger microphone gain sensitivity is medium, high finger microphone gain sensitivity is maximum

6: SIM selection

Select either card slot 1 or card slot 2 that is currently used

7: Automatic SIM switchover

After closing, only the current SIM card is used, and it will not switch to another card slot

8: Call prompt tone

After the intercom is turned off, the beep will no longer play

9: Automatic lock key

1. Switch: The automatic lock key function can be turned on or off after entering
2. Lock time: You can select the time to lock the keyboard automatically after entering

10: Sound quality selection

Standard definition is 4K, HD is 8K, and the group needs a unified sound quality option to avoid the phenomenon of interoperability.

11: Restore Settings

After entering, you can confirm whether to restore all the functional Settings of the factory. Press **⏪** to confirm, and press **OK** to return.

local

You can view:

- 1 account information,
- 2 software version,
- 3 module version,
- 4 MUC version,
- 5IMEI,
- 6 ICCID,
- 7 ICCID2 and,
- 8 Application versions